


For FAL, POR, CNDL and GLA Models series: 8763, 8766, 8767, 8768

### IMPORTANT

- Justice Design recommends that a licensed electrician install this lighting fixture
- Installation must comply with all building, safety, and electrical codes and requirements
- Disconnect power to the junction box prior to installation
- Do not reconnect power until this fixture is properly installed
- This fixture is designed for use with a standard metal 4-0 octagonal junction box
- This fixture requires additional support that is independent of the junction box. Consult local building, safety, and electrical codes and requirements prior to installation.


### Hardware Pack contains:

- A. 2 - Mounting Screws
- B. 2 - Wire Nuts
- C. 1 - Mounting Hickey
- D. 2 - Metal Washers
- E. 3 - Lock Washers
- F. 3 - Hex Nuts
- G. 1 - Chain Support
- H. 1 - Long Nipple
- I. 1 - Short Nipple
- J. 1 - Allen Wrench
- K. 1 - Fixture Bar

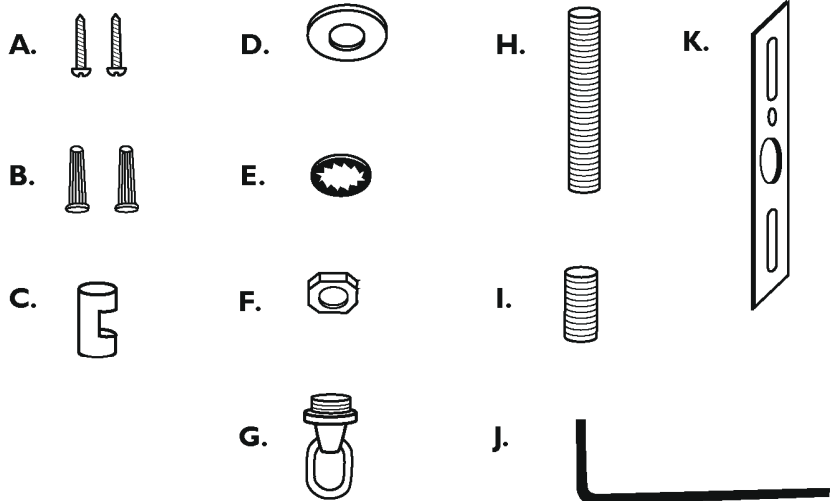


1

Attach Mounting Hickey and Short Fixture Nipple to threaded Long Support Nipple in center of Junction Box. For safety, Long Support Nipple must be secured to a structural support rated to carry the load. (Check local requirements.)

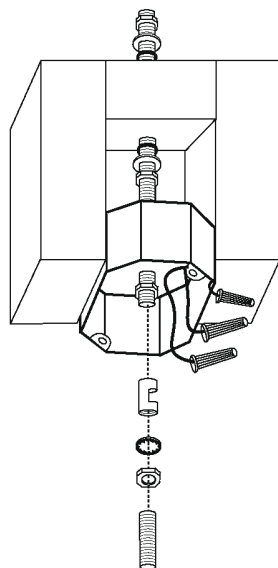

2


Attach Fixture Bar to junction box using Mounting Screws.

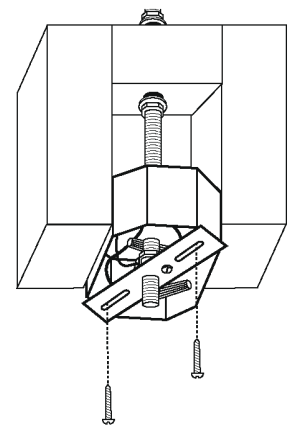

# Ring Chandelier


3

Attach ring by positioning arms against threaded conduit. Pull excess wire into intermediate canopy. Assemble intermediate canopy using ball finial.

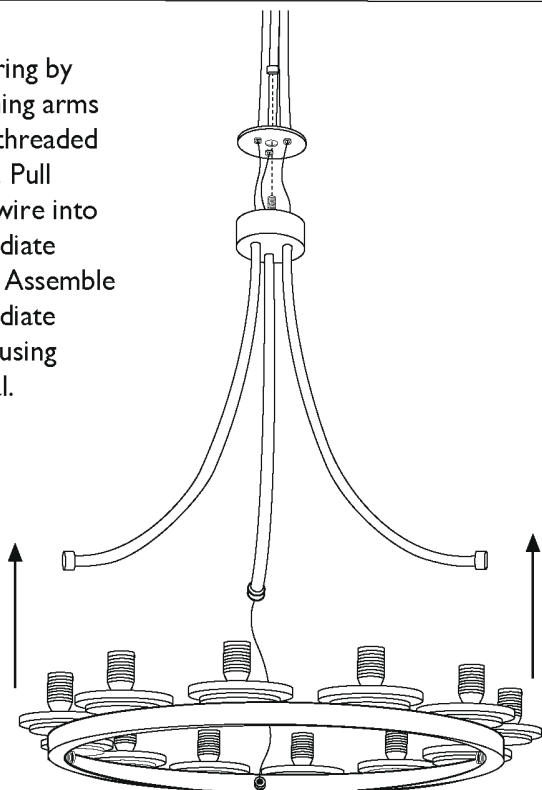

4

Make sure that all connections are aligned and are tight.

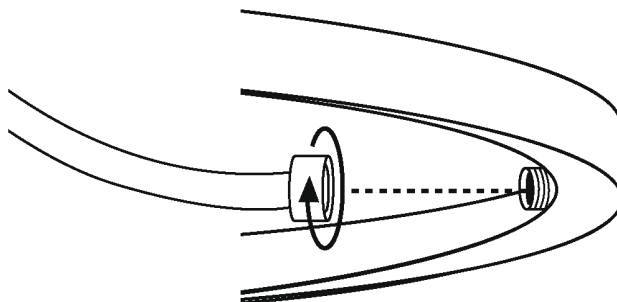

5


Attach fixture by screwing Chain Support onto nipple.

Weave fixture wires through chain and connect to supply wires using wire nuts. Observe polarity: black to power, white to neutral, and bare copper to green ground.

Tuck wires and wire nuts into junction box.

Secure Chain Support by tightening set screw.

Secure canopy to chain support using knurled ring.

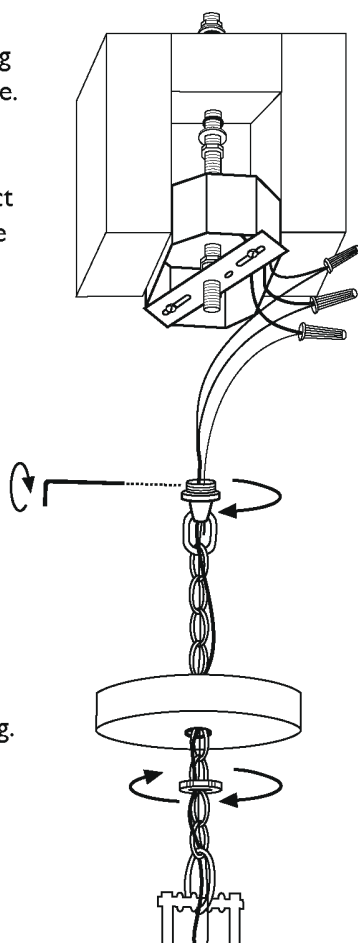


6

Holding the chandelier in place, determine desired chain length.

Adjust chain by removing links. Twist links with pliers to open. Take care not to damage cord.

Remove excess links. Close links by twisting links back into position.

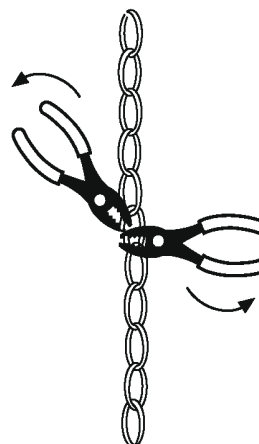

# Ring Chandelier

7

Attach shade by placing over socket. Secure with shade spacer and shade lock ring.

Install bulbs. Take care never to exceed maximum wattage.

Please see the additional enclosed sheet for care instructions.

