


Installation Instructions Pendants

For Models series: SKT-8816-RIGID with GU24


IMPORTANT

- Justice Design recommends that a licensed electrician install this lighting fixture
- Installation must comply with all building,safety,and electrical codes and requirements
- Disconnect power to the junction box prior to installation
- Do not reconnect power until this fixture is properly installed
- This fixture is designed to mount to a standard metal 4-0 octagonal junction box




Hardware Pack contains:

- A. 2-Mounting Screws
- B. 2-Wire Nuts



1


Pull fixture wires through desired tubes.
Connect the desired tubes by
screwing them firm.

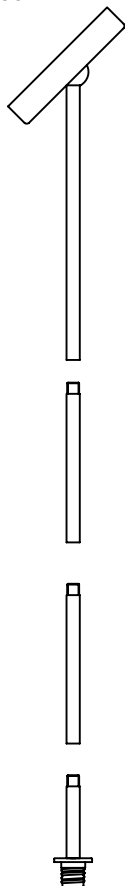

2

Pull fixture wires
through center hole
of fixture bar. Connect
fixture wires to
supply wires using
Wire Nuts.


Observe polarity: black
to power; white to neutral.

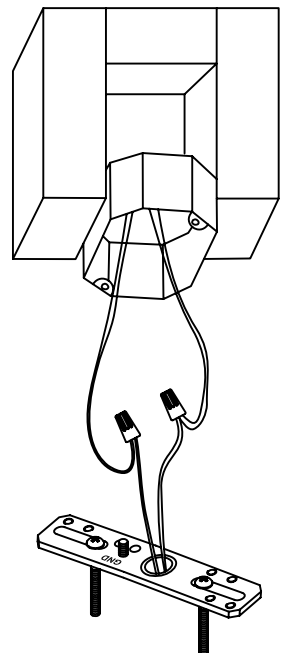

Pendants

3

Tuck wires and Wire
Nuts into junction box.
Attach crossbar to
Junction box using
Mounting Screws.

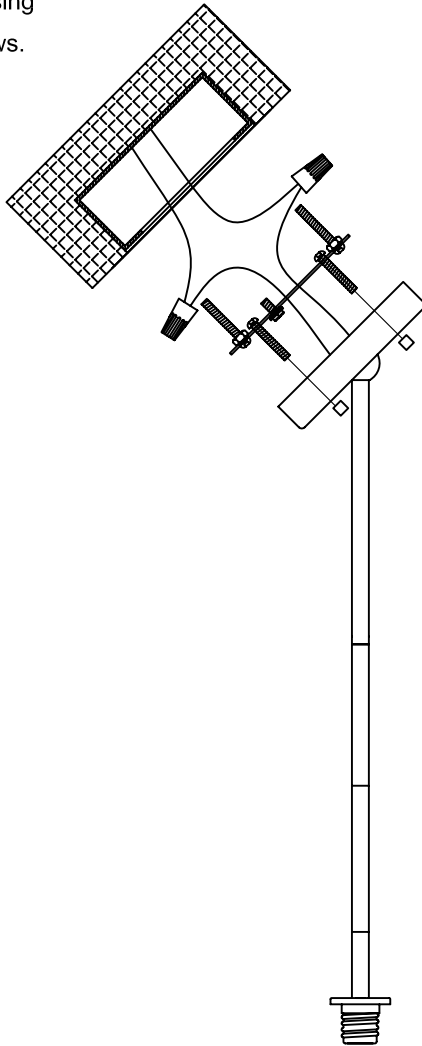

4

Attach canopy to
fixture bar by placing
fixture onto two (2) screws,
secure fixture with
two (2) finials.
Be careful not to
over-tighten finials
or you may damage
canopy.

Place shade over socket.
Secure with socket lock ring.

Please see the
additional enclosed sheet
for care instructions.

